


NORMALLY CLOSED VOLT-FREE ALARM CONTACT. OPEN ON ALARM ACTIVATION, FAILSAFE OPEN. - BY OTHERS

VOLT-FREE CONTACT OUTPUT. TO BE UTILISED BY CUSTOMER BMS OR ALERT SYSTEM. CURTAIN UP, CURTAIN DOWN & CURTAIN FAULT.

VOLT-FREE CONTACT OUTPUT. TO BE UTILISED BY CUSTOMER BMS OR ALERT SYSTEM. BATTERY LOW, BATTERY DISCONNECTED & BATTERY FAULT.

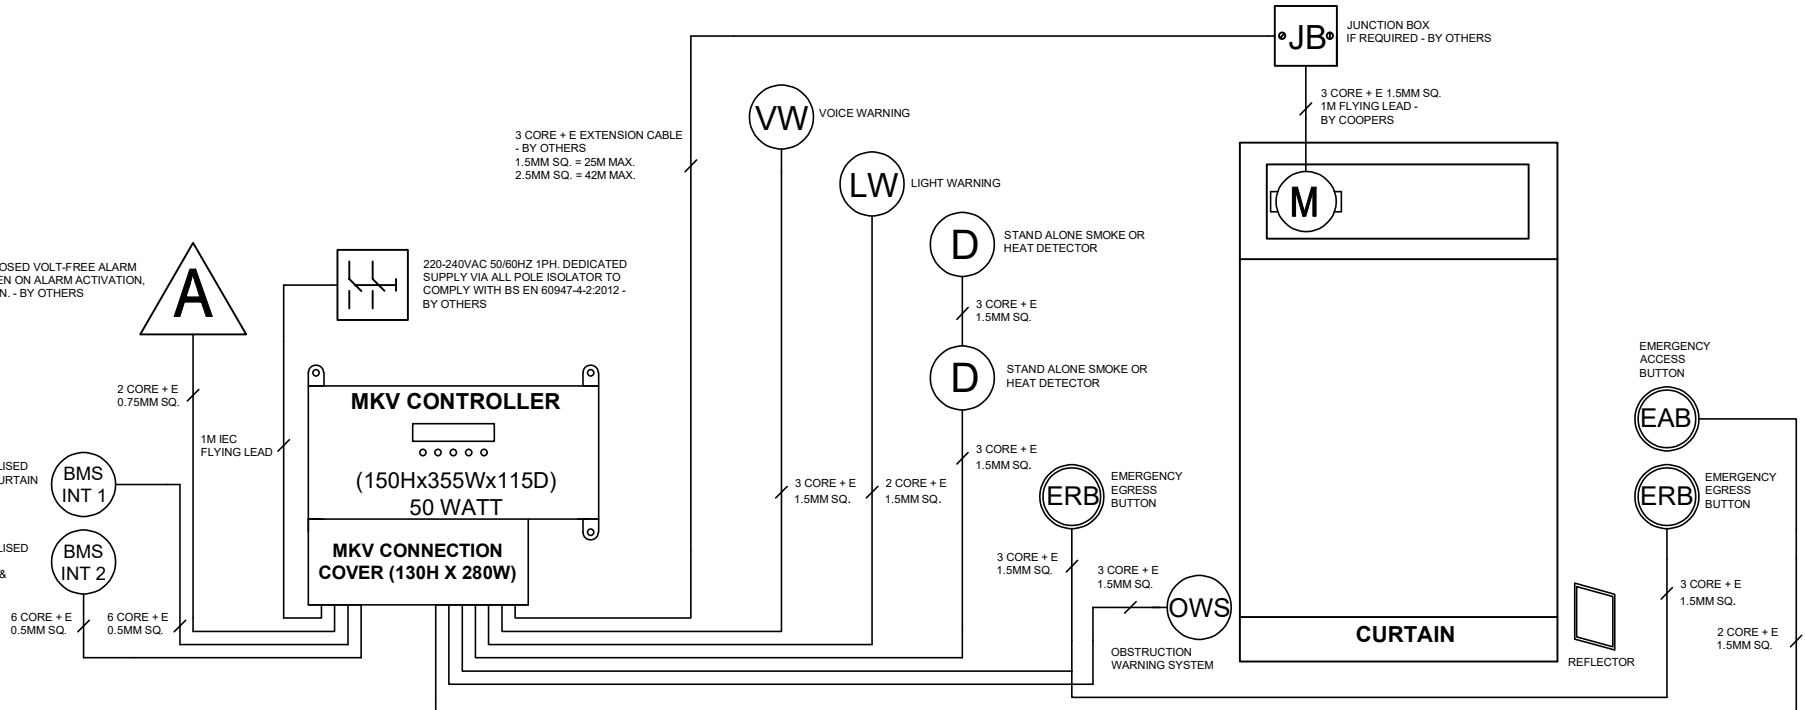

3 CORE + E EXTENSION CABLE
- BY OTHERS
1.5MM SQ. = 25M MAX.
2.5MM SQ. = 42M MAX.

220-240VAC 50/60HZ 1PH. DEDICATED SUPPLY VIA ALL POLE ISOLATOR TO COMPLY WITH BS EN 60947-4-2:2012 - BY OTHERS

MKV CONTROLLER

(150Hx355Wx115D)
50 WATT

MKV CONNECTION COVER (130H X 280W)

JB JUNCTION BOX
IF REQUIRED - BY OTHERS

3 CORE + E 1.5MM SQ.
1M FLYING LEAD -
BY COOPERS

M

VW VOICE WARNING

LW LIGHT WARNING

D STAND ALONE SMOKE OR
HEAT DETECTOR

D STAND ALONE SMOKE OR
HEAT DETECTOR

ERB EMERGENCY
EGRESS
BUTTON

OWS
OBSTRUCTION
WARNING SYSTEM

EMERGENCY
ACCESS
BUTTON

EAB

ERB EMERGENCY
EGRESS
BUTTON

CURTAIN

REFLECTOR

3 CORE + E
1.5MM SQ.

2 CORE + E
1.5MM SQ.



Ignis House, Houghton Avenue,
Waterlooville, Hampshire, PO7 3DU, UK

Tel: +44 (0)2392 454 405

Email: info@coopersfire.com
Web: www.coopersfire.com

DRAWN: RW	TITLE: MKV TYPICAL WIRING DIAGRAM	
CHECKED: MA	© 2020 COOPERS FIRE LIMITED ALL RIGHTS RESERVED. THIS DESIGN MAY NOT BE REPRODUCED IN ANY MATERIAL FORM, INCLUDING ELECTRONICALLY WITHOUT THE WRITTEN PERMISSION OF THE COPYRIGHT NAMES	ALL DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE STATED
APPROVED: JR	DRG. No. MK5_WIR_A	ISSUE: A DATE: 08.10.20