

DATA SHEET STANDARD KEY SWITCH

STOCK CODE: 787-3105

VERSION: Issue B - May 2020



LEADING THE WAY IN FIRE PROTECTION

STANDARD KEY SWITCH

PRODUCT DESCRIPTION


The Coopers Fire Standard Key Switch can be used on Variospeed®6 or MK5 control systems.

It can be used as a remote means of testing the Fire/Smoke curtains. Turning the key switch to position '1' will deploy the curtains. Turning the key switch to position '0' will retract the curtains.

The Standard Key Switch can also be used to reset stand-alone smoke/heat detectors when connected to the Variospeed®6 control system.

Please refer to the electrical schematics provided with the control system for connection details

CONNECTION DETAILS

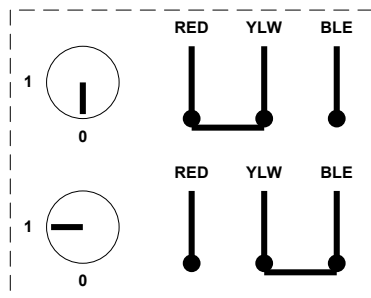

Please note that the key cannot be removed when in position '1'.



SPECIFICATION

Voltage Rating
250Vac @ 50Hz

Current Rating
2 Amps @ 250Vac
4 Amps @ 125Vac

Weight
166g

Material
ABS

Colour
Red

Dimensions (mm)
87(w) x 87(h) x 52mm(d)

IP Rating
IP24

Operating Temperature
-20°C to 55°C

Coopers Fire Ltd
Ignis House,
Houghton Avenue,
Waterlooville, Hampshire
PO7 3DU.
United Kingdom

Coopers Fire Ltd has a policy of continuous product improvement. As such we reserve the right to change design and specifications without prior notice.

Phone: +44 (0)2392 454 405
Email: info@coopersfire.com
Web: www.coopersfire.com

Please check our website for the latest information

© Coopers Fire Ltd. All content and products are copyright of Coopers Fire Ltd. Registered in England Number: 2010274. Multiple patents granted and pending.